

# bizhub c251i Color A3 multifunctional









### **CUSTOMER BENEFITS**



Intuitive operability
Operate the bizhub like a
smartphone or tablet with fully
customised user interface



Mobile connectivity
Print anytime from anywhere
with Konica Minolta's innovative mobile technologies



Security
Secure network integration,
data encryption, hard drive
overwrite, and advanced user
authentication



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



**Productivity**Reliability, high-speed scanning and printing, combined with powerful finishing functions




**Sustainability** Numerous eco features reduce energy consumption and costs

### **OPTIONS**




FOIP activation LK-117




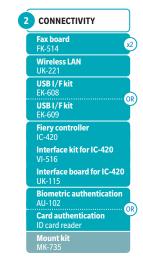





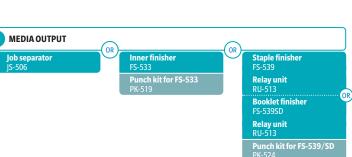



### **FINISHING FUNCTIONALITIES**







0000

Duplex

















Corner T stapling oint Two-hole ing punching Four-hole punching

mixplex/ mixmedia Half-fold SI

Sheet insertion

Letter-fold E

Booklet

Offset sorting

Banner printing

Corner Stapling (offline)

## **DESCRIPTION**

| ENHANCED FEATURES   |   |
|---|---|
| LK-105v4 OCR text recognition   | Searchable PDF and PPTX   |
| LK-106 Barcode fonts  | Supports native barcode printing  |
| LK-107 Unicode fonts  | Supports native Unicode printing  |
| LK-108 OCR A and B fonts  | Supports native OCR A and B font printing   |
| LK-110v2 Document converter pack  | Generates various file formats incl. DOCX, XLSX and PDF/A   |
| LK-111 ThinPrint® client  | Print data compression for reduced network impact   |
| LK-114 Serverless pull printing   | Secure and Follow Me printing solution requiring no server  |
|   | application   |
| LK-115v2 Trusted Platform Module  | Trusted Platform Module for protection of data encryption   |
|   | and decryption  |
| LK-116 Antivirus  | Bitdefender® antivirus provides real time scanning of   |
|   | all incoming and outgoing data  |
|   |   |
| LK-117 FOIP activation  | Fax over IP networks (T.38), requires fax kit   |
| LK-117 FOIP activation  | Fax over IP networks (T.38), requires fax kit   |
| LK-117 FOIP activation  CONNECTIVITY  | Fax over IP networks (T.38), requires fax kit   |
|   | Fax over IP networks (T.38), requires fax kit  Super G3 fax, digital fax functioality   |
| CONNECTIVITY  |   |
| CONNECTIVITY<br>FK-514 Fax board  | Super G3 fax, digital fax functioality  |
| CONNECTIVITY<br>FK-514 Fax board<br>UK-221 Wireless LAN   | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode  |
| CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN EK-608 USB I/F kit  | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode USB keyboard connection  |
| CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit   | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth   |
| CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit IC-420 Fiery controller   | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth Professional colour print controller  |
| CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit IC-420 Fiery controller VI-516 Interface kit for IC-420                                   | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth Professional colour print controller Fiery controller interface card                                  |
| CONNECTIVITY FK-514 Fax board UK-221 Wireless LAN EK-608 USB I/F kit EK-609 USB I/F kit IC-420 Fiery controller VI-516 Interface kit for IC-420 UK-115 Interface board for IC-420 | Super G3 fax, digital fax functioality Wireless LAN and wireless LAN Access Point Mode USB keyboard connection USB keyboard connection; Bluetooth Professional colour print controller Fiery controller interface card Fiery controller interface board |

| OTHERS                          |   |
|---------------------------------|---|
| DF-632 Document feeder          | Reversing automatic document feeder, capacity 100 originals |
| DF-714 Document feeder          | Dualscan automatic document feeder, capacity 100 originals  |
| OC-511 Original Cover           | Cover instead of ADF  |
| WT-506 Working table            | Authentication device placement                             |
| FS-P04 Offline Stapler          | Offline stapler, 20 sheets stapling                         |
| KP-102 10-Key pad               | For use instead of touchscreen                              |
| EM-908 Replacement SSD          | 1 TB SSD to increase storage space                          |
| KH-102 Keyboard holder          | To place USB keyboard                                       |
| CU-102 Air cleaning unit        | Improving indoor air quality by reduced emission            |
|                                 |   |
| MEDIA INPUT                     |   |
| IM-103 Intelligent media sensor | Autodetects paper weight and type                           |
| PC-116 1x Universal tray        | 500 sheets, A5-A3, 52-256 g/m <sup>2</sup>                  |
| PC-216 2x Universal tray        | 2x 500 sheets, A5-A3, 52-256 g/m <sup>2</sup>               |
| PC-416 Large capacity tray      | 2,500 sheets, A4, 52-256 g/m <sup>2</sup>                   |
| PC-417 Large capacity tray      | 1,500 + 1,000 sheets, A5-A4, 52-256 g/m <sup>2</sup>        |
| DK-516x Copier desk             | Provides storage space for print media and other materials  |
| LU-302 Large capacity tray      | 3,000 sheets, A4, 52-256 g/m <sup>2</sup>                   |
|                                 |   |
| MEDIA OUTPUT                    |   |
| IS-506 Job separator            | Separation of fax output; etc.                              |
| FS-533 Inner finisher           | 50-sheet stapling, 500 sheets max. output                   |
| PK-519 Punch kit for FS-533     | 2/4 hole punching, autoswitching                            |
| FS-539 Staple finisher          | 50 sheets stapling; 3,200 sheets max. output                |
| FS-539SD Booklet finisher       | 50 sheets stapling; 20 sheets booklet finisher;             |
|                                 | 2,200 sheets max. output                                    |
| PK-524 Punch kit for FS-539/SD  | 2/4 hole punching; autoswitching                            |

For FS-539/SD installation

### **TECHNICAL SPECIFICATIONS**

### SYSTEM SPECIFICATIONS

| System speed A4                | Up to 25/25 ppm (mono/colour)                               |
|--------------------------------|---|
| System speed A3                | Up to 15/15 ppm (mono/colour)                               |
| Autoduplex speed A4            | Up to 25/25 ppm (mono/colour)                               |
| 1st page out time A4           | 5.2/6.9 sec. (mono/colour)                                  |
| Warm-up time                   | Approx. 11/11 sec. (mono/colour) <sup>1</sup>               |
| Imaging technology             | Laser   |
| Toner technology               | Simitri® V polymerised toner                                |
| Panel size/resolution          | 10.1" / 1024 x 600  |
| System memory                  | 8,192 MB (standard/max)                                     |
| System hard drive              | 256 GB SSD (standard) / 1 TB SSD (optional)                 |
| Interface                      | 10/100/1,000-Base-T Ethernet; USB 2.0;                      |
|                                | Wi-Fi 802.11 b/g/n/ac (optional)                            |
| Network protocols              | TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour |
| Automatic document feeder      | Up to 100 originals; A6-A3; 35-163 g/m <sup>2</sup> ;       |
| (optional)                     | RADF or Dualscan ADF available                              |
| ADF double feed detection      | Standard (with dualscan ADF)                                |
| Printable paper size           | A6-SRA3; customized paper sizes;                            |
|                                | banner paper max. 1,200 x 297 mm                            |
| Printable paper weight         | 52-300 g/m <sup>2</sup>                                     |
| Paper input capacity           | 1,150 sheets / 6,650 sheets (standard/max)                  |
| Paper tray input (standard)    | 1x 500; A6-A3; custom sizes; 52-256 g/m <sup>2</sup>        |
|                                | 1x 500; A5-SRA3; custom sizes; 52-256 g/m <sup>2</sup>      |
| Paper tray input (optional)    | 1x 500 sheets; A5-A3; 52-256 g/m <sup>2</sup>               |
|                                | 2x 500 sheets; A5-A3; 52-256 g/m <sup>2</sup>               |
|                                | 1x 2,500 sheets; A4; 52-256 g/m <sup>2</sup>                |
|                                | 1x 1,500 + 1x 1,000 sheets; A5-A4; 52-256 g/m²              |
| Large capacity tray (optional) | 1x 3,000; A4; 52-256 g/m <sup>2</sup>                       |

### SYSTEM SPECIFICATIONS

RU-513 Relay unit

| Manual bypass                | 150 sheets; A6-SRA3; custom sizes, banner; 60-300 g/m²              |
|------------------------------|---|
| Finishing modes (optional)   | Offset; Group; Sort; Staple; Punch; Half-fold; Letter-fold; Booklet |
| Automatic duplexing          | A6-SRA3; 52-256 g/m <sup>2</sup>                                    |
| Output capacity              | Up to 250 sheets / up to 3,300 sheets (standard/max)                |
| Stapling                     | Max. 50 sheets or 48 sheets + 2 cover sheets (up to 209 g/m²)       |
| Stapling output capacity     | Max. 100 sets   |
| Letter fold                  | Max. 3 sheets   |
| Letter fold capacity         | Max. 30 sets; unlimited (without tray)                              |
| Booklet                      | Max. 20 sheets or 19 sheets + 1 cover sheet (up to 209 g/m²)        |
| Booklet output capacity      | Max. 20 booklets; unlimited (without tray)                          |
| Duty cycle (monthly)         | Rec. 16,000 pages; Max. <sup>2</sup> 130,000 pages                  |
| Toner lifetime               | Black up to 28,000 pages  |
|                              | CMY up to 28,000 pages  |
| Imaging unit lifetime        | Black up to 170,000/1,000,000 pages (drum/developer)                |
|                              | CMY up to 65,000/1,000,000 pages (drum/developer)                   |
| Power consumption            | 220-240 V / 50/60 Hz; Less than 1.58 kW                             |
| System dimension (W x D x H) | 615 x 688 x 779 mm (without options)                                |
| System weight                | Approx. 84.0 kg (without options)                                   |
|                              |   |

#### PRINTER SPECIFICATIONS

| Print resolution          | 1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi           |
|---------------------------|---|
| Page description language | PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS    |
| Operating systems         | Windows 10 (32/64); Windows 11; Windows Server 2012;    |
|                           | Windows Server 2012 R2; Windows Server 2016;            |
|                           | Windows Server 2019; Windows Server 2022;               |
|                           | macOS 10.14 or later; Unix; Linux; Citrix               |
| Printer fonts             | 80 PCL Latin; 137 PostScript 3 Emulation Latin;         |
|                           | Barcode fonts (optional); OCR A and B fonts (optional); |
|                           | Unicode fonts (optional)                                |
| Mobile printing           | AirPrint (iOS); Mopria (Android);                       |
|                           | Konica Minolta Mobile Print (iOS/Android)               |
|                           | optional: WiFi Direct                                   |
|                           |   |

#### PRINTER SPECIFICATIONS (OPTIONAL)

| Print controller          | Embedded Fiery IC-420                                |
|---------------------------|--|
| Controller CPU            | AMD GX-424CC @ 2.4 GHz                               |
| Memory/HDD                | 4,096 MB / 500 GB                                    |
| Page description language | Adobe PostScript 3 (CPSI 3020); PCL 6; PCL 5c        |
| Operating systems         | Windows 7 (32/64); Windows 8.1 (32/64);              |
|                           | Windows 10 (32/64); Windows 11; Windows Server 2022; |
|                           | macOS 10.14 or later                                 |
|                           |  |

#### SCANNER SPECIFICATIONS

| Scan speed        | Up to 100/100 ipm in simplex (mono/colour)                    |
|-------------------|---|
|                   | Up to 200/200 ipm in duplex (mono/colour)                     |
| Scan resolution   | Up to 600 x 600 dpi   |
| Scan modes        | Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home);       |
|                   | Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV;        |
|                   | Scan-to-DPWS; Scan-to-URL; TWAIN scan                         |
| File formats      | JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS |
|                   | PPTX; PDF/A 1a and 1b   |
|                   | optional: Searchable PDF; Searchable DOCX/PPTX/XLSX           |
| Scan destinations | 2,000 destinations + 100 groups; LDAP support                 |

| COPIER SPECIFICATIONS |                                     |
|-----------------------|-------------------------------------|
| Copy resolution       | 600 x 600 dpi                       |
| Gradation             | 256 gradations                      |
| Multicopy             | 1-9,999                             |
| Original format       | Max. A3                             |
| Magnification         | 25-400% in 0.1% steps; Auto-zooming |

#### **FAX SPECIFCIATION**

| Fax standard     | Super G3 (optional)                   |
|------------------|---------------------------------------|
| Fax transmission | Analogue; i-Fax; Colour i-Fax; IP-Fax |
| Fax resolution   | Up to 600 x 600 dpi                   |
| Fax compression  | MH; MR; MMR; JBIG                     |
| Fax modem        | Up to 33.6 Kbps                       |
| Fax destinations | 2,000 single + 100 groups             |

#### **USER BOX SPECIFICATIONS**

| Storable documents   | Up to 3,000 documents or 10,000 pages                       |
|----------------------|---|
| Type of user boxes   | Public; Personal (with password or authentication);         |
|                      | Group (with authentication)                                 |
| Type of system boxes | Secure print; Encrypted PDF print; Fax receipt; Fax polling |

| Security   | ISO15408 Common Criteria (in evaluation);                         |
|------------|---|
|            | IP filtering and port blocking;                                   |
|            | SSL3 and TLS1.1/1.2/1.3 network communication; IPsec support;     |
|            | IEEE 802.1x support; User authentication; Authentication log;     |
|            | Secure print; Kerberos; Hard drive overwrite;                     |
|            | Hard drive data encryption (AES 256); Confidential fax;           |
|            | Print user data encryption  |
|            | optional: Antivirus realtime scanning (Bitdefender®)              |
| Accounting | Up to 1,000 user accounts; Active Directory support (user name +  |
|            | password + e-mail + smb folder); User function access definition; |
|            | Authentication by mobile device (Android)                         |
|            | optional: Biometric authentication (finger vein scanner);         |
|            | ID card authentication (ID card reader);                          |
|            | Authentication by mobile device (iOS)                             |
| Software   | Net Care Device Manager; Data Administrator; Box Operator;        |
|            | Web Connection; Print Status Notifier; Driver Packaging Utility;  |
|            | Log Management Utility  |

<sup>&</sup>lt;sup>1</sup> Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged









#### Product appearance, configuration and/or specifications are subject to change without notice. This product is not available for some countries or regions.

KONICA MINOLTA, symbol mark, Giving Shape to Ideas, bizhub, Konica Minolta Optimised Print Services logo and bizhub SECURE logo are registered trademarks or trademarks of KONICA MINOLTA, INC. Android, Google, and Google Cloud Print are registered trademarks or trademarks or trademarks of Google Inc. in the U.S. and other countries. Mac and App Store are registered trademarks or trademarks of Apple Inc. in the U.S. and other countries. Mopria and Mopria logo are registered trademarks or trademarks of Mopria Alliance Inc. Bluetooth is a registered trademark or trademark or trademark or trademark or trademark or United Bluetooth SIG, Inc. Wi-Fi is a registered trademark of Wi-Fi Alliance. Microsoft Store, Windows Mobile and Power Point are registered trademarks or trademarks of Microsoft Corporation in the U.S. or other countries. Bitdefender logo is a registered trademark or trademark of Bitdefender IPR Management Ltd. All other brands and product names are registered trademarks or trademarks of their respective companies or organisations.



### Requirements for safe use

- Please read and follow the instruction manual to ensure safe operation.
   Only operate using appropriate power supply and voltage.
   Connecting the earth wire to an inappropriate place may cause explosion or electric shock. Please connect accordingly (Taiwan and the Philippines only).

Konica Minolta Business Solutions (HK) Ltd. | www.konicaminolta.hk Konica Minolta















<sup>&</sup>lt;sup>2</sup> If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed