

bizhub 751i

Black & White A3 multifunctional









CUSTOMER BENEFITS



Intuitive operability
Operate the bizhub like a
smartphone or tablet with fully
customised user interface



Security
Secure network integration,
data encryption, storage data
overwrite, and advanced user
authentication



Application ecosystem Enhanced efficiency thanks to Konica Minolta's extensive applications portfolio



ProductivityReliability, high-speed scanning and printing, combined with powerful finishing functions



Services
Efficient printer fleet management, including automatic consumables delivery, pro-active


maintenance and remote setup



Sustainability

Numerous eco features reduce energy consumption and costs

OPTIONS




Serverless pull printing LK-114 Trusted Platform Module LK-115v2


Antivirus LK-116












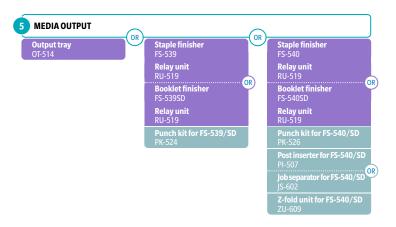



FINISHING FUNCTIONALITIES





























Corner stapling

Two-point stapling Two-hole punching Four-hole punching

Duplex

Combined mixplex/ mixmedia Half-fold

Sheet insertion

:

Letter-fold

Booklet

det

Offset sorting

Z-fold

Banner printing Corner Stapling (offline)

DESCRIPTION

| 2 | |
|----------------------------------|---|
| LK-104v3 Voice guidance | Supports voice guidance |
| LK-105v4 OCR text recognition | Searchable PDF and PPTX |
| LK-106 Barcode fonts | Supports native barcode printing |
| LK-107 Unicode fonts | Supports native Unicode printing |
| LK-108 OCR A and B fonts | Supports native OCR A and B font printing |
| LK-110v2 Document converter pack | Generates various file formats incl. DOCX, XLSX and |
| | searchable PDF |
| LK-111 ThinPrint® client | Print data compression for reduced network impact |
| LK-114 Serverless pull printing | Secure and Follow Me printing solution requiring no server |
| | application |
| LK-115v2 Trusted Platform Module | Trusted Platform Module for protection of data encryption and |
| | decryption |
| LK-116 Antivirus | Bitdefender® antivirus provides real time scanning of all |
| | incoming and outgoing data |

CONNECTIVITY

| FK-514 Fax board | Super G3 fax, digital fax functioality |
|---------------------------------|---|
| UK-221 Wireless LAN | Wireless LAN and wireless LAN Access Point Mode |
| EK-608 USB I/F kit | USB keyboard connection |
| EK-609 USB I/F kit | USB keyboard connection; Bluetooth |
| AU-102 Biometric authentication | Finger vein scanner |
| ID card reader | Various ID card technologies |
| MK-735 Mount kit | Installation kit for ID card reader |

OTHERS

| WT-506 Working table | Authentication device and/or offline stapler placement |
|--------------------------|--|
| FS-P04 Offline Stapler | Offline stapler, 20 sheets stapling |
| WT-519 Upright panel | Working table for upright panel |
| KP-102 10-Key pad | For use instead of touchscreen |
| SC-509 Security kit | Copy guard function |
| EM-908 Replacement SSD | 1 TB SSD to increase storage space |
| KH-102 Keyboard holder | To place USB keyboard |
| CU-102 Air cleaning unit | Improving indoor air quality by reduced emission |

MEDIA INPUT

| IM-103 Intelligent media sensor | Autodetects paper weight and type |
|---------------------------------|--|
| LU-303 Large capacity tray | 3,000 sheets, A4, 52–256 g/m ² |
| LU-205 Large capacity tray | 2,500 sheets, A4–SRA3, 52–256 g/m ² |
| MK-730 Banner trav | Multinage hanner feeding |

MEDIA OUTPUT

| WILDIA GOTT GT | |
|------------------------------------|--|
| OT-514 Output tray | Output tray used instead of finisher |
| FS-539 Staple finisher | 50 sheets stapling; 3,200 sheets max. output |
| FS-539SD Booklet finisher | 50 sheets stapling; 20 sheets booklet finisher; |
| | 2,200 sheets max. output |
| PK-524 Punch kit for FS-539/SD | 2/4 hole punching; autoswitching |
| FS-540 Staple finisher | 100 sheets stapling; 3,200 sheets max. output |
| FS-540SD Booklet finisher | 100 sheets stapling; 20 sheets booklet finisher; |
| | 2,700 sheets max. output |
| PK-526 Punch kit for FS-540/SD | 2/4 hole punching; autoswitching |
| RU-519 Relay unit | For FS-539/SD or FS-540/SD installation |
| PI-507 Post inserter for FS-540/SD | Cover insertion; post finishing |
| JS-602 Job separator for FS-540/SD | Separation of fax output; etc. |
| ZU-609 Z-fold unit for FS-540/SD | Z-fold for A3 prints |
| | |

TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS

| System speed A4 | Up to 75 ppm |
|--------------------------------|--|
| System speed A3 | Up to 37 ppm |
| Autoduplex speed A4 | Up to 75 ppm |
| 1st page out time A4 | 2.8 sec. |
| Warm-up time | Approx. 14 sec. ¹ |
| Imaging technology | Laser |
| Toner technology | Simitri V toner |
| Panel size/resolution | 10.1" / 1024 x 600 |
| System memory | 8,192 MB (standard/max) |
| System hard drive | 256 GB SSD (standard) / 1 TB SSD (optional) |
| Interface | 10/100/1,000-Base-T Ethernet; USB 2.0; |
| | Wi-Fi 802.11 b/g/n/ac (optional) |
| Network protocols | TCP/IP (IPv4 / IPv6); SMB; LPD; IPP; SNMP; HTTP(S); Bonjour |
| Automatic document feeder | Up to 300 originals; A6-A3; 35-210 g/m²; Dualscan ADF |
| ADF double feed detection | Standard |
| Printable paper size | A6-SRA3; customized paper sizes; |
| | banner paper max. 1,200 x 297 mm |
| Printable paper weight | 52-300 g/m ² |
| Paper input capacity | 3,650 sheets / 6,650 sheets (standard/max) |
| Paper tray input (standard) | 1x 500; A6-A3; custom sizes; 52-256 g/m ² |
| | 1x 500; A5-SRA3; custom sizes; 52-256 g/m ² |
| | 1x 1,500; A5-A4; 52-256 g/m ² |
| | 1x 1,000; A5-A4; 52-256 g/m ² |
| Large capacity tray (optional) | LU-303 3,000; A4; 52-256 g/m ² |
| | LU-205 2,500; A4-SRA3; custom sizes; 52-256 g/m ² |
| Manual bypass | 150 sheets; A6-SRA3; custom sizes, banner; 60-300 g/m² |
| Finishing modes (optional) | Offset; Group; Sort; Staple; Staple (offline); Punch; Half-fold; |
| | Letter-fold; Booklet; Post insertion; Z-fold |
| Automatic duplexing | A6-SRA3; 52-256 g/m ² |

SYSTEM SPECIFICATIONS

| Output capacity | Up to 200 sheets / up to 3,300 sheets (standard/max) |
|------------------------------|--|
| Stapling | Max. 100 sheets or 98 sheets + 2 cover sheets (up to 300 g/m²) |
| Stapling output capacity | Max. 200 sets |
| Letter fold | Max. 3 sheets |
| Letter fold capacity | Max. 50 sets; unlimited (without tray) |
| Booklet | Max. 20 sheets or 19 sheets + 1 cover sheet (up to 300 g/m²) |
| Booklet output capacity | Max. 35 booklets; unlimited (without tray) |
| Duty cycle (monthly) | Rec. 80,000 pages; Max. ² 300,000 pages |
| Toner lifetime | Black up to 40,000 pages |
| Imaging unit lifetime | Black up to 260,000/1,000,000 pages (drum/developer) |
| Power consumption | 220-240 V / 50/60 Hz; Less than 2.10 kW |
| System dimension (W x D x H) | 615 x 688 x 1207 mm (without options) |
| System weight | Approx. 140.0 kg (without options) |

PRINTER SPECIFICATIONS

| Print resolution | 1,800 (equivalent) x 600 dpi; 1200 x 1200 dpi |
|---------------------------|---|
| Page description language | PCL 6 (XL3.0); PCL 5c; PostScript 3 (CPSI 3016); XPS |
| Operating systems | Windows 10 (32/64); Windows 11; Windows Server 2012; |
| | Windows Server 2012 R2; Windows Server 2016; |
| | Windows Server 2019; Windows Server 2022; |
| | macOS 10.14 or later; Unix; Linux; Citrix |
| Printer fonts | 80 PCL Latin; 137 PostScript 3 Emulation Latin |
| | Optional: Barcode fonts; OCR A and B fonts; Unicode fonts |
| Mobile printing | AirPrint (iOS); Mopria (Android); |
| | Konica Minolta Mobile Print (iOS/Android) |
| | optional: WiFi Direct |
| | |

| SCANNER SPECIFICATION | DNS |
|-----------------------|---|
| Scan speed | 200dpi Up to 140/140 ipm in simplex (mono/colour) |
| | Up to 280/280 ipm in duplex (mono/colour) |
| | 600dpi Up to 80/75 ipm in simplex (mono/colour) |
| | Up to 160/150 ipm in duplex (mono/colour) |
| Scan resolution | Up to 600 x 600 dpi |
| Scan modes | Scan-to-eMail (Scan-to-Me); Scan-to-SMB (Scan-to-Home); |
| | Scan-to-FTP; Scan-to-Box; Scan-to-USB; Scan-to-WebDAV; |
| | Scan-to-DPWS; Scan-to-URL; TWAIN scan |
| File formats | JPEG; TIFF; PDF; Compact PDF; Encrypted PDF; XPS; Compact XPS |
| | PPTX; PDF/A 1a and 1b |
| | optional: Searchable PDF; Searchable DOCX/PPTX/XLSX |

COPIER SPECIFICATIONS

Scan destinations

| Copy resolution | 600 x 600 dpi |
|-----------------|-------------------------------------|
| Gradation | 256 gradations |
| Multicopy | 1-9,999 |
| Original format | Max. A3 |
| Magnification | 25-400% in 0.1% steps: Auto-zooming |

2,000 destinations + 100 groups; LDAP support

FAX SPECIFCIATION

| Fax standard | Super G3 (optional) | |
|------------------|---------------------------------------|--|
| Fax transmission | Analogue; i-Fax; Colour i-Fax; IP-Fax | |
| Fax resolution | Up to 600 x 600 dpi | |
| Fax compression | MH; MR; MMR; JBIG | |
| Fax modem | Up to 33.6 Kbps | |
| Fax destinations | 2,000 single + 100 groups | |
| | | |

USER BOX SPECIFICATIONS

Storable documents Up to 3,000 documents or 10,000 pages









USER BOX SPECIFICATIONS

| Type of user boxes | Public; Personal (with password or authentication); |
|----------------------|---|
| | Group (with authentication) |
| Type of system boxes | Secure print; Encrypted PDF print; Fax receipt; Fax polling |
| SYSTEM FEATURES | |
| Security | ISO15408 Common Criteria (in evaluation); |
| | IP filtering and port blocking; |
| | TLS1.2/1.3 network communication; IPsec support; IEEE 802.1x |
| | support; User authentication; Authentication log; Secure print; |
| | Kerberos; Storage data overwrite; |
| | Storage data encryption (AES 256); Confidential fax; |
| | Print user data encryption |
| | optional: Antivirus realtime scanning (Bitdefender®); |
| | Copy protection (Copy Guard, Password Copy) |
| Accounting | Up to 1,000 user accounts; Active Directory support (user name + |
| | password + e-mail + smb folder); User function access definition; |
| | Authentication by mobile device (Android) |
| | optional: Biometric authentication (finger vein scanner); |
| | ID card authentication (ID card reader); |
| | Authentication by mobile device (iOS) |
| Software | Data Administrator; Web Connection; HDD Backup Utility; |
| | Driver Packaging Utility; Log Management Utility; |
| | Font Management Utility; Download Manager |

¹ Warm-up time may vary depending on the operating environment and usage

- All specifications refer to A4-size paper of 80 g/m2 quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (6% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged

Product appearance, configuration and/or specifications are subject to change without notice. This product is not available for some countries or regions.

Konica Minolta Business Solutions (HK) Ltd. | www.konicaminolta.hk (Konica Minolta

KONICA MINOLTA, symbol mark, Giving Shape to Ideas, bizhub, Konica Minolta Optimised Print Services logo and bizhub SECURE logo are registered trademarks or trademarks of KONICA MINOLTA, INC. Android, Google, and Google Cloud Print are registered trademarks or trademarks of Google Inc. in the U.S. and other countries. Mac and App Store are registered trademarks or trademarks of Apple Inc. in the U.S. and other countries. Mopria and Mopria logo are registered trademarks or trademarks of Mopria Alliance Inc. Bluetooth is a registered trademark or trademark or



Requirements for safe use

Please read and follow the instruction manual to ensure safe operation.

Only operate using appropriate power supply and voltage.

Connecting the earth wire to an inappropriate place may cause explosion or electric shock.

Please connect accordingly (Taiwan and the Philippines only).











 $^{^{\}mathrm{2}}$ If the maximum volume is reached within a period of one year, then a maintenance cycle must be